

TYPE DESIGN FOR 12 & 18 BED RUNNING ROOMS

SCALE - 8 FT - 1 INCH
CASE NO 750 W/O
CALCULATION NO
CANCELS TYPE


REVISIONS		
NO	DESCRIPTION	INITIALS
1	G. B. SINGH S. P. D.	
2	C. L. KAPOOR S. P. D.	
3	S. A. GANDHI S. P. D.	
4	KRIPANAN S. P. D.	

TRUE COPY


- NOTE -
1. MAXIMUM PRESSURE ON FOUNDATIONS = 17.5'.
 2. FOUNDATIONS SHOWN IN THIS DRAWING ARE SUITABLE FOR AN AVERAGE SOIL (RANDOMLY FINE MIXTURE OF CLAY & SAND IN VARYING PROPORTIONS). THEY CAN HOWEVER BE VARIED FOR THE TYPE OF SOIL THE TYPE OF FOUNDATION IS SUITABLE FOR THE AVERAGE.
 3. FLOORING OVER PORT CONCRETE CONSISTING OF 2" OF PORTLAND CEMENT CONCRETE WITH TWO COATS OF BITUMULUM SHOULD BE PROVIDED TO ALL WALLS.
 4. ALL INTERIOR WORK SHALL BE IN LINE WITH THE EXTERIOR WORK.
 5. ALL EXTERIOR WALL SURFACE SHOULD BE IN LINE WITH THE EXTERIOR WORK.
 6. ALL EXTERIOR WALL SURFACE SHOULD BE IN LINE WITH THE EXTERIOR WORK.
 7. ALL DOORS & WINDOWS SHOULD BE OF 2" THICK DOOR & WINDOW. THERE WILL HAVE WIRE GAUGE SHUTTERS EXCEPT DOORS TYPE 15, 16, 17, 18 & 19 WHICH WILL HAVE WIRE GAUGE SHUTTERS ONLY.
 8. FOR DETAILS OF THE ABOVE SEE TYPE 0-45, SHEET 1.
 9. FOR DETAILS OF R.C.C. BEAMS, SLABS, COLUMNS, LINTELS, ETC. SEE SHEET 10-1.
 10. FOR DETAILS OF LOCKER, SHOWER, RECESS, FIRE PLACE ETC. SEE TYPE 0-45, SHEET 10-2.
 11. THE TYPE DESIGN MAY BE FOLLOWED ALSO FOR REQUIREMENTS UP TO 24 BEDS BY ADDING ONE MORE BED ROOM WITH ATTACHED FULL BATH. INSTEAD OF 12 LAMP GLASS, 24 LAMP GLASS IS SHOWN HERE.

- LEGEND
- PERMANENT LIGHT
 - BRACKETS
 - △ CEILING HANGING LIGHT
 - W.P. WATER PLUMBING FIXTURE
 - S.A. SINK IN ALUMINUM
 - B. BED
 - Q. QUEEN BED
 - W.B. WASH BOWL
 - S. SINK
 - T. TUB
 - K.C. HOT COLD


DESIGNED BY	K. KRIPANAN
CHECKED BY	S. P. D.
TRACED BY	M. G. SINGH
COMPILED BY	H. S. SINGH

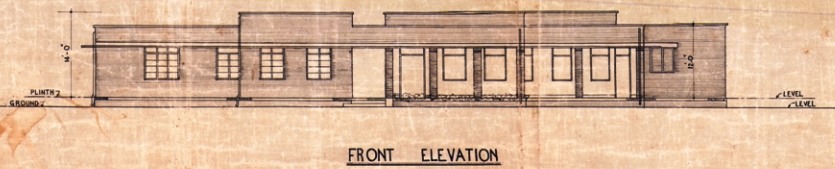


FRONT ELEVATION

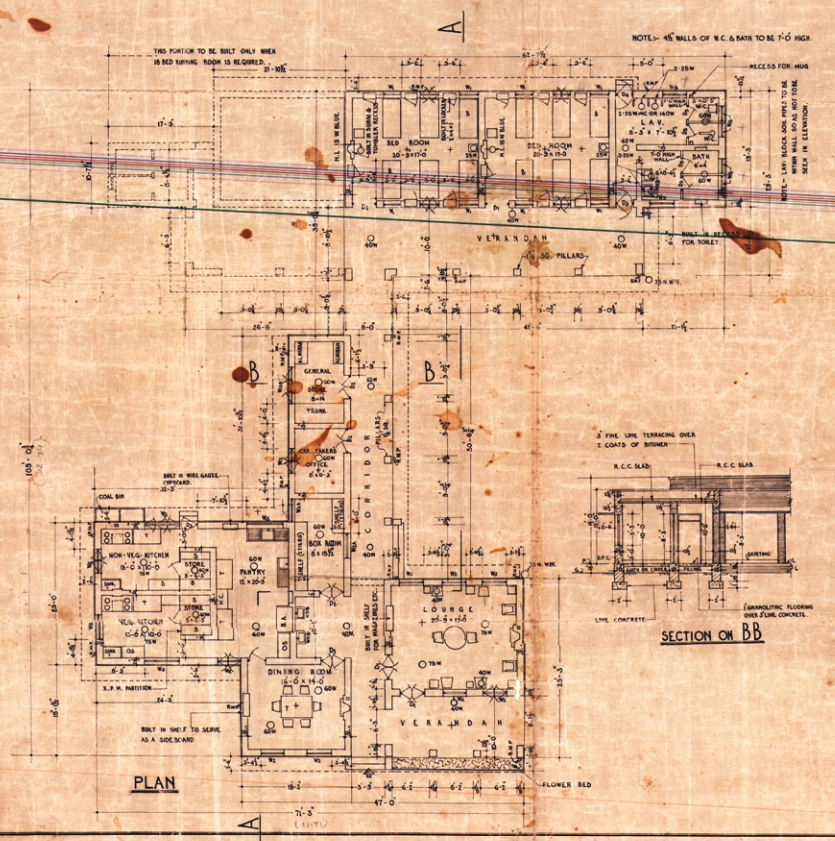

PLAN

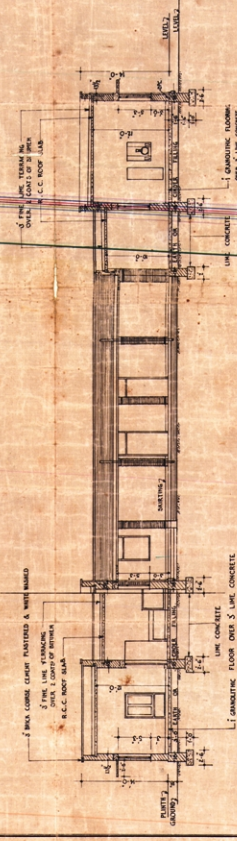

SECTION ON AA



SECTION ON BB